



Security

# ADC V722W - Outdoor Camera

## Installation Guide

### Required Items for Installation

- ADC-V722W Camera
- AC Power Adapter
- Ethernet or Wireless Internet Connection
- Computer/Tablet/Smartphone device
- Subscription to ADT Interactive with video service enabled



## 2 Options to connect ADC-V722W to the Wireless Network

### Wi-Fi Protected Setup (WPS) Mode

Wirelessly connect the camera using a WPS enabled router

### Access Point (AP) Mode

Use an Internet enabled device to connect the camera

### Connect using Wi-Fi Protected System (WPS) Mode

1. Connect AC power adapter and plug into an outlet
2. After 2 minutes, hold down the WPS button until LED flashes blue (3 seconds)
3. Press the WPS Button on the router
4. Wireless connection is complete once the LED turns solid green
5. Follow instructions under **Video Device Enrolment** to add the camera to your ADT Interactive account



WPS Button located on the back of the camera

### Connect using Access Point (AP) Mode

1. Connect AC power adapter and plug into an outlet
2. After 2 minutes, hold down the WPS button until the LED flashes white (6 seconds).
3. Using your internet enabled device, search for available networks. Connect to the wireless network **ALARM (XX:XX:XX)** where **XX:XX:XX** is the last six digits of the ADC-722W's MAC address.


(The MAC Address can be found on the back of the mount of the camera.)

4. On the same device, open a web browser and enter **http://722winstall** in the URL field.
5. Follow the following on-screen instructions

- A. Select the Wi-Fi network that the camera will connect to



- C. Select the Wi-Fi network that the camera will connect to

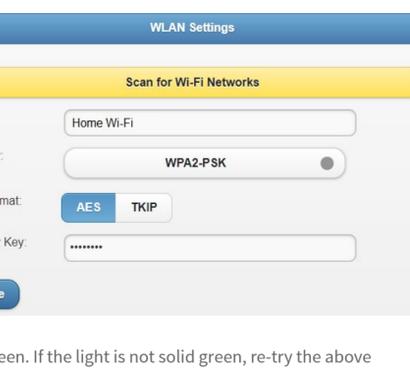

- D. Enter the Wi-Fi password in security (if required) and save

6. The wireless connection is complete once the LED light turns solid green. If the light is not solid green, re-try the above process or try an alternative method of connecting the camera
7. Follow instructions under **Video Device Enrolment** to add the camera to your ADT Interactive account

## LED Reference Guide

### Camera Status

LED Colour	Status	Description
	Connected to the Internet	The camera has a local network and internet connection
	Local Network Connection Only	The camera has a local network connection but is not connected to the Internet
	Not Connected	No connection to local network or to the internet
	System Booting	Camera is booting up

### Wireless Enrolment

LED Colour	Status	Description
	WPS Mode	Press and hold the WPS button on the back of camera and release when flashing blue. This can take up to 3 seconds.
	AP Mode	Press and hold the WPS button on the back of the camera and release when flashing white. This can take up to 6 seconds.

### Factory Reset

LED Colour	Status	Description
	Factory Reset	To perform a factory reset, press and hold the WPS button and release when flashing green and red. This can take up to 15 seconds.  <b>WARNING:</b> This restores the camera back to factory-default settings.  The camera may need to be re-added to your ADT Interactive account after performing a factory reset.


## Video Device Enrolment

Once the camera has an internet connection, it will need to be installed on your ADT Interactive account.

1. Log in to ADT Interactive via <https://www.adtsecurity.com.au/interactive-security-login/>




2. If this is the first camera being added on to the account:
  - a) Select **Video**
  - b) Click on **'Click here to add a camera to this account'**

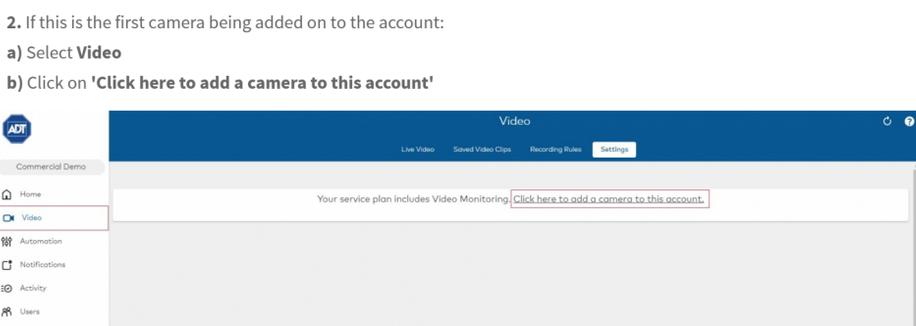

If you have previously installed a different camera:

- a) Select **Video**
- b) Click **Settings**
- c) Click **Add Video Device**

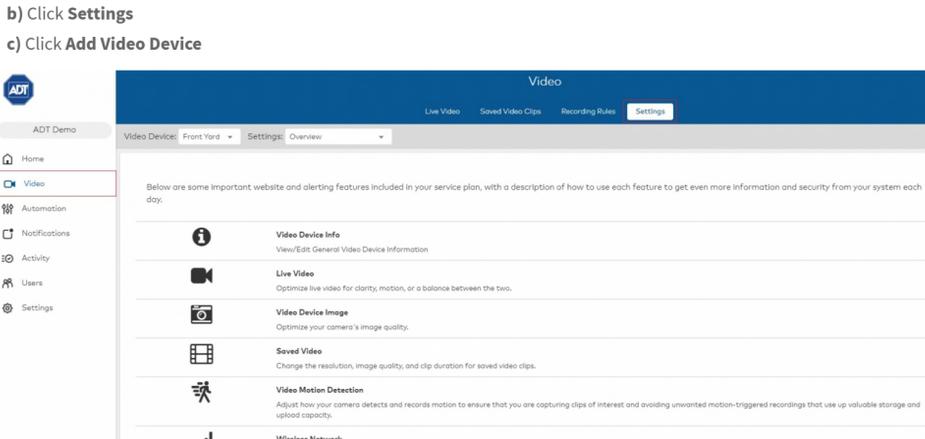

3. The camera should've been discovered by the network.

If the network still hasn't detected the camera:

- a) Click on Refresh OR
- b) Enter the MAC Address of the camera

4. Name the Camera

5. Click **Install**

